

3221 San Fernando Rd, Los Angeles, CA 90065
Tel: (800) 888-8148 * Fax: (323) 255-1312
Web: www.ninjabump.com E-mail: info@ninjabump.com

OWNER'S MANUAL SAFETY RULES

Mickey's Choo Choo Express
SKU: MCCE-3C


READ AND SAVE THESE INSTRUCTIONS

NINJA JUMP INC.

OWNER'S MANUAL OPERATING INSTRUCTIONS & SAFETY RULES

OPERATING INSTRUCTIONS


Select the area in which the inflatable will be inflated. The following ground locations are good for setting up the jumper: medium dense coarse sands, sandy gravels, very stiff silts, and clays. Select an area which is at least 15' larger than the inflatable's base so you will have a 3' clearance on all sides. Before setting up the inflatable, check and make sure to have at least a 6' clearance from overhead telephone wires, or any other utility wires, etc. Also, check the area for any ground obstructions such as protruding sprinklers, underground pipes, etc. Make certain that you pick a level area to set the inflatable on and not one that's hilly or slanted. Place the unit in the middle of the selected area. Always use the tarp, set the tarp down first and place the jump on it. Untie straps and unroll.

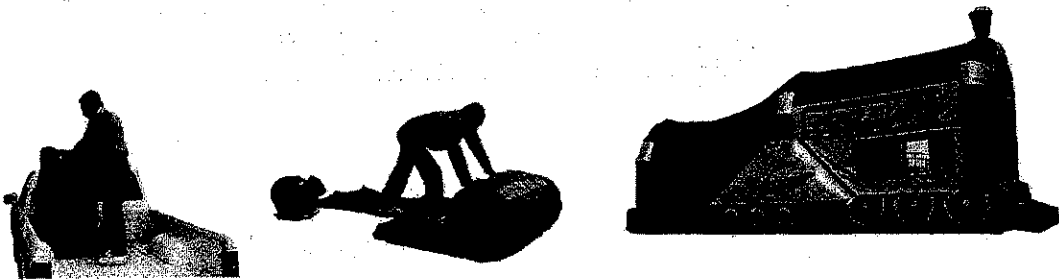


Connect tube (choose the one closest to the electricity source) to the blower. If there is more than one air tube, twist the vent of the other tube/s several times, fold it over, and secure it with a strap. Check all tubes for snugness to make certain that no air is escaping and re-tie and re-connect, if necessary. Also, check the air intake on the side of the motor/blower for blockage. Make sure to always use a 1 hp blower with a minimum of 700 and a maximum of 900 CFM.

You should carry a 50' 12 gauge exterior UL-approved extension cord to accommodate longer distances to the electricity source. Always plug motor/blower into a 115V outlet 20 amp circuits (usually found in kitchens and laundry rooms) and inflate the unit.

After the unit is inflated, check with the customer if the placement of the inflatable is satisfactory. If so, connect the tie down straps of the jumper (two are provided in each location for extra strength in case one strap wears out and/or tears) to the 330A Chance Anchor and drive the anchor into the ground at a minimum depth of 28" and at a 45° angle on all tie down straps and at all locations as provided by manufacturer on the particular ride. Remember to install the soil anchors at such distance from the jumper that the jumper straps connected to the shackle and anchor would be taut.

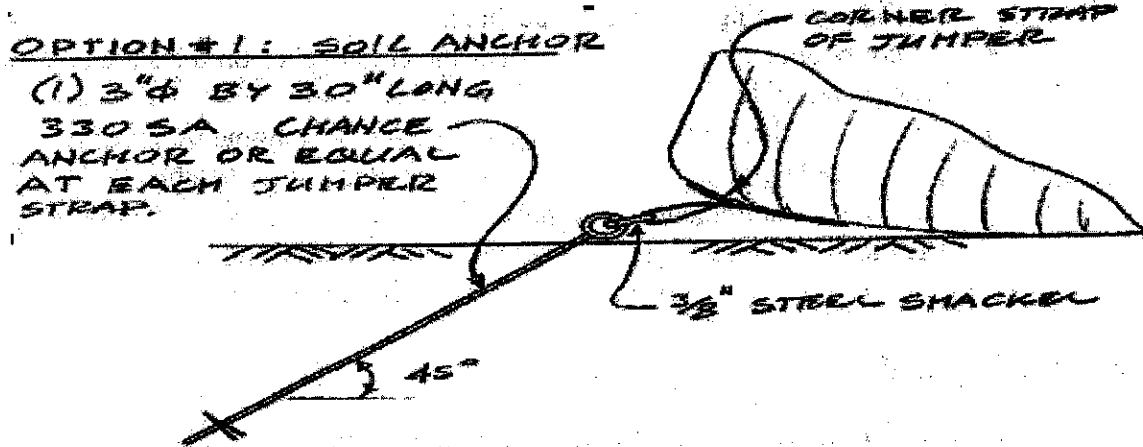

If the unit is on cement or any hard surface, to protect the base of the unit from abrasion, make sure that you have put the tarp down and placed the unit on it before inflating it. Use sand bag pouches that can carry a minimum of 200 lb. tension load. Place two sand bag pouches each with enough sand (140 lbs. for the Mini Slide and 160 lbs. for the Choo Choo and Regular types, the Fire Truck and Mystery Machine) at each of the tie down straps and at all locations as provided by manufacturer on the particular ride. Connect the tie down straps to the sand bag pouches. Remember to install sand bags at such distance from the jumper that the jumper straps connected to the shackle would be taut.

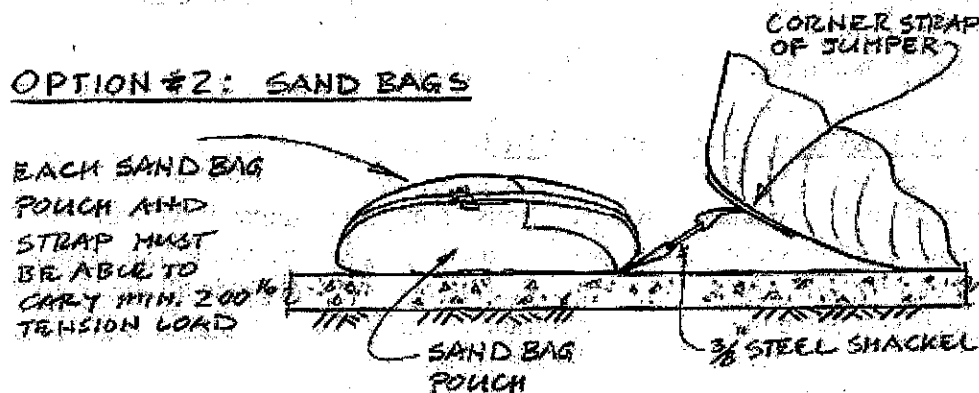

SAFETY FIRST

1. A Warning Sign with the following copy is attached and made part of each inflatable. All rules should be followed for rider's safety.
 - Do not use the ride unless attendant is present.
 - All riders must remove shoes, eyeglasses, and any other hard or sharp objects that can cause injury.
 - No flips, wrestling, running, or pushing.
 - Do not bounce against the sides, near the entrance, or on the slide area (if the ride is a slide).
 - No food, drinks, gum, pets, or silly strings and no hanging on the unit.
 - Exit if ride begins to lose air. Use exit doors and escape hatches.
 - Do not use and immediately deflate the ride if winds exceed 15 mph.
 - The blower requires a ground fault protected circuit (GFCI).
 - Only compatible age groups and size shall use the ride at the same time.

ADDITIONAL SAFETY RULES

2. No riders should be allowed on a partially inflated unit.
3. Maximum number of riders of each group that should play in the unit at one time is 10 Children aged eight and under or 6 to 8 Children aged nine to twelve and/or a Maximum Weight of 1,200 lbs.
4. Under no circumstances is climbing on the exterior of the inflatable allowed.
5. Caution should be exercised when lifting and handling the equipment.
6. All extension cords and straps should be placed in such a manner that no one can trip on them. Also, no electrical cords should run through puddles or near a pool.
7. Do not install inflatables near a pool.
8. Never remove the ground pin from the cord. Use an adapter.
9. All inflatables should be securely anchored and fully inflated before any riders are allowed to jump.
10. The blanket should be used on all slides at all times.

EMERGENCY EVACUATION PROCEDURE

The Attendant, before operating the ride, must familiarize himself with the ride's entrance/exit as well as escape hatches. In the unforeseeable event that power is interrupted and the ride begins to lose air, the Attendant should guide all the riders to calmly and orderly leave the ride via the entrance/exit.

All rides that have permanent roofs feature Escape Hatches on the roof. The Attendant may choose to have the riders exit the ride through these easily accessible escape hatches. All rides that have convertible roofs offer the Attendant the alternative of allowing the riders to exit the ride through the wide openings around the roof.

REPAIRS & MAINTENANCE

To repair holes and tears up to 12", use "Single Patch Method," utilizing the patch kit provided with each unit as follows: (1) Cut an oval or round shape vinyl patch, approximately 2" larger than the cut; (2) Clean around the torn area; (3) Apply glue on the patch and around the torn area; (4) Let it dry for 3 minutes; (5) Place the patch covering the damaged area and press with your palm for 1 minute. In approximately 15 minutes, the glue should dry and the unit will be ready to be inflated.

For larger tears, you can use the "Double Patch Method," as follows: (1) Put a patch inside the torn area by applying glue and pressing to the inside surface of the torn area; (2) After this is done, apply another patch to the outside surface of the torn area following the above-mentioned steps.

It is a good practice to clean the inflatables after each use. It is easier to clean the units in an inflated position by using dishwashing detergent and rags for general clean-up. To remove chewing gum, grease, adhesives, etc., use "Goof Off" and for mildew use "X-14." To reach high spots, untie the vent tube so unit gets soft and pull down from the sides.

WARNING: To clean printed areas of rides, never use any solvents or other type of cleaners except plain soap and water.

Make sure the unit is dry before rolling up and storing.

"Lemon Pledge" can be used for protection. All inflatables should be cleaned and dried every time they are exposed to rain to avoid mildew and unpleasant odors. If water has been accumulated inside the mattress and other inaccessible areas, the unit should be inflated outdoors and tilted to a 45 degree angle for as long as needed to drain all the water out.

A unit usually dries in about 2 hours.

ATTENTION: NJ & KY CLIENTS

All New Jersey and Kentucky-based rental companies who purchased Ninja Jump inflatables are requested to refer to the Owner's Manual for procedures pertaining to the proper anchoring of the inflatables.

Per New Jersey Department Of Community Affairs regulation, engineering certifications outline the appropriate anchor size and alternate ballast system taking into consideration live and wind loads.


Ninja Jump's standard package does not include the ground anchors described in the aforementioned engineering report. The specified ground anchors are available and can be purchased separately from Hogan Company Inc. for New Jersey. Ask for **AUGER-STYLE ANCHORS** (5/8" x 30").

HOGAN COMPANY, INC.
2741 South Lilac Ave
Bloomington, CA 92316

909 421-0245 phone
909 421-0249 fax

ORDER DESK: 800-214-6426
E-MAIL: carterhogancompany@earthlink.net
WEBSITE: www.stakesnotsteaks.com

* they also have warehouses in Nashville, TN and in Harrisburg, PA

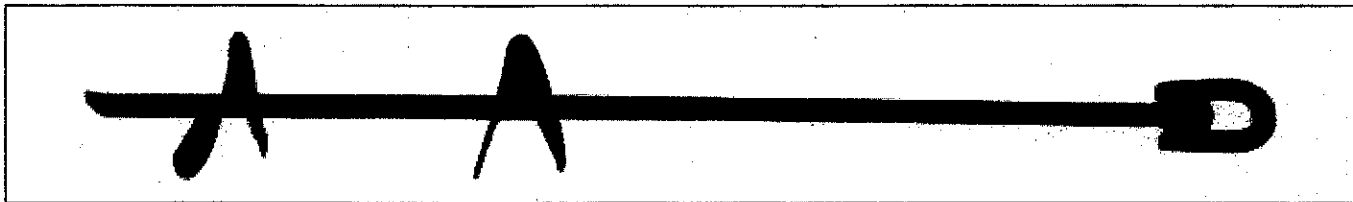

- Double Helix / Extra holding power
- Great for sand and loose soil